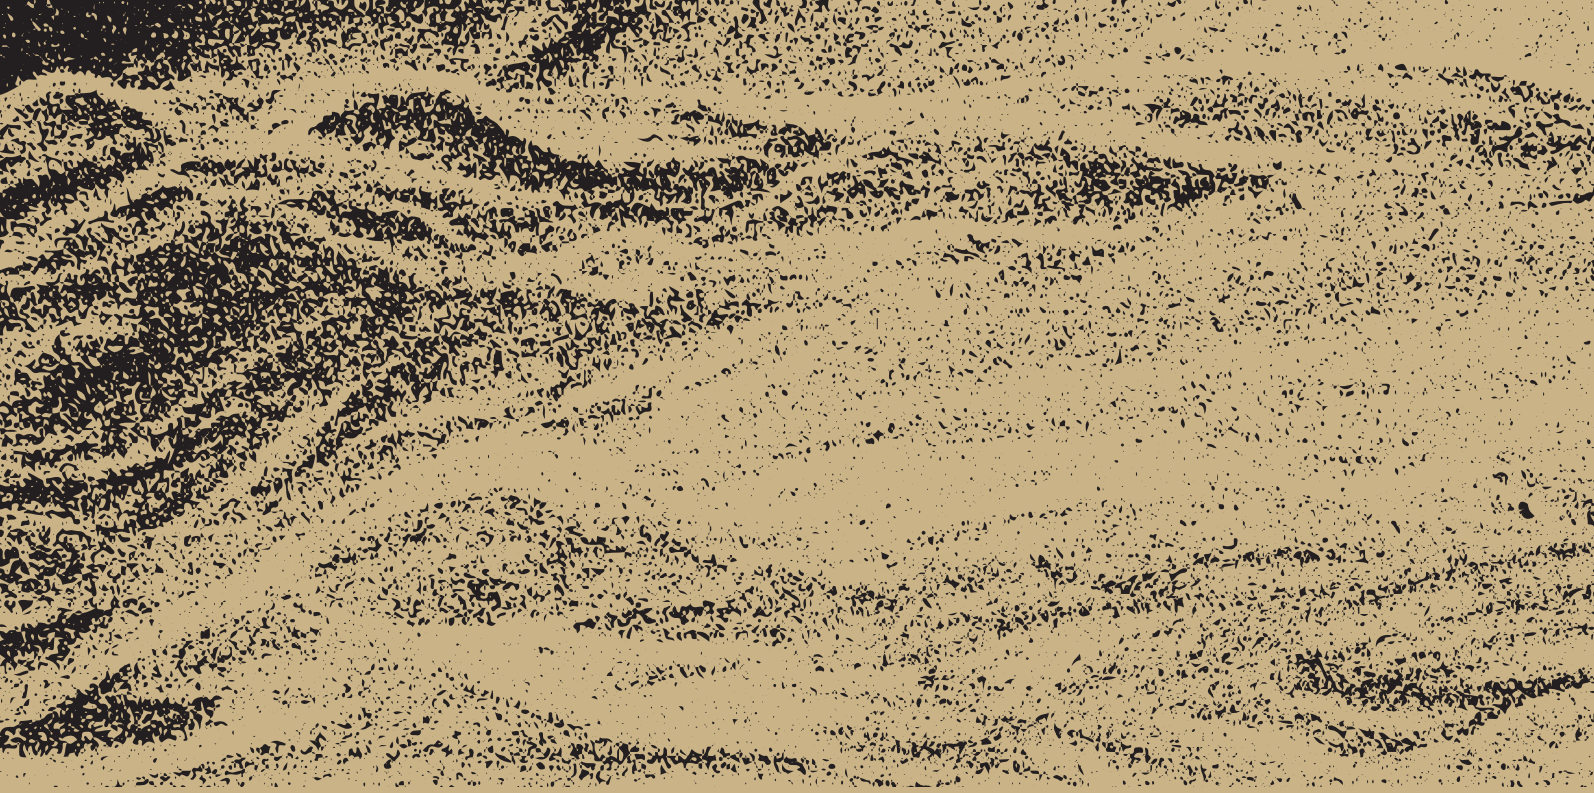


THAR COLLECTION

GLAZED VITRIFIED TILES

COLOURED BODY

colortile
ceramics & innovation

colortile
ceramics & innovation

when,

ceramic blends with innovation, innovation in ceramic happens.

COLORTILE specialises in the production of high-quality PORCELAIN & CERAMIC TILES for residential and commercial premises. We aim to bring architects dream to reality. As a leading tile manufacturer in India, COLORTILE specialises in PORCELAIN & CERAMIC TILES of the highest, international quality. For over a decade, COLORTILE has been an innovator in the manufacture of PORCELAIN & CERAMIC TILES, led by two simple objectives:

1.Raising the quality standards of the industry.
2.Fully satisfying our ever-experimenting customers.

With 3 state-of-the-art manufacturing plants at Morbi, Gujarat, COLORTILE today has an annual installed production capacity of over 10 million sq. mtr. of tiles. Our production units are well-supported with a dedicated R&D centre that keeps us ahead of the curve.

Mission

We manufacture wall and floor tiles that rank high on quality and aesthetic value irrespective of the place where they are applied. We are the first choice of residential, commercial and public buildings for indoor and outdoor application. We forge long-term partnership with all our clients by providing them excellent service. We keep our ears close to the ground to satisfy the needs of an evolving market.

Vision

Always putting the high bars & wanted to achieve them with all the dynamism in design and latest technological investments to put COLORTILE a top notch brand in the tile world. We COLORTILE family promised ourselves to grow and maintain the quality forever.

Inspiration



inspired from the beauty of nature &
aspired form the tones of desert available
in 4 different sizes and 6 elegant colors.

Innovation



THAR


**GLAZED
VITRIFIED
TILES**



The natural surface

SAND FINISH
GLAZED VITRIFIED TILES

COLOURED BODY

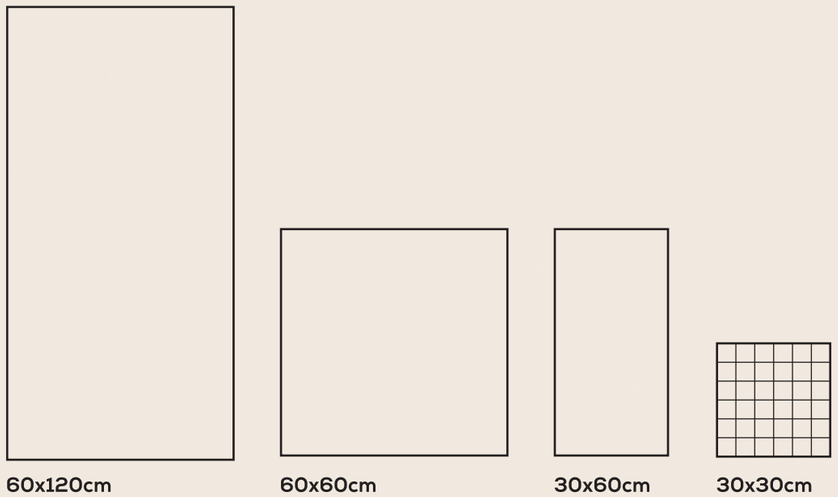

60x120cm | 60x60cm | 30x60cm | 30x30cm


4 Sizes | **6** Colors | **1** Finish

THAR



Thar Sand | Thar Dawn | Thar Wood | Thar Stream | Thar Smoke | Thar Coal


Application Areas

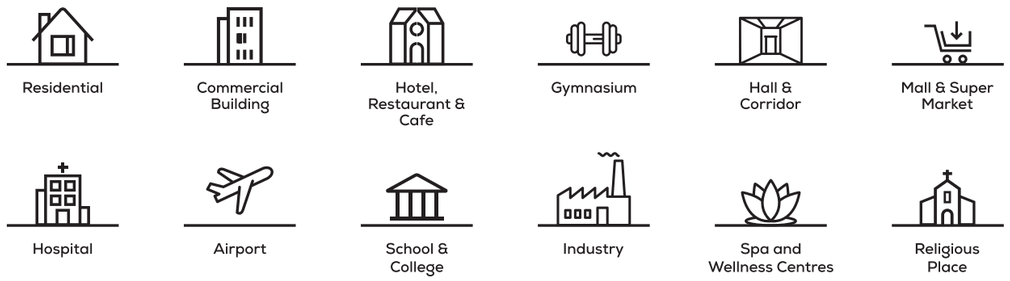

Residential | Commercial Building | Hotel, Restaurant & Cafe | Gymnasium | Hall & Corridor | Mall & Super Market

Hospital | Airport | School & College | Industry | Spa and Wellness Centres | Religious Place

Technical Specification

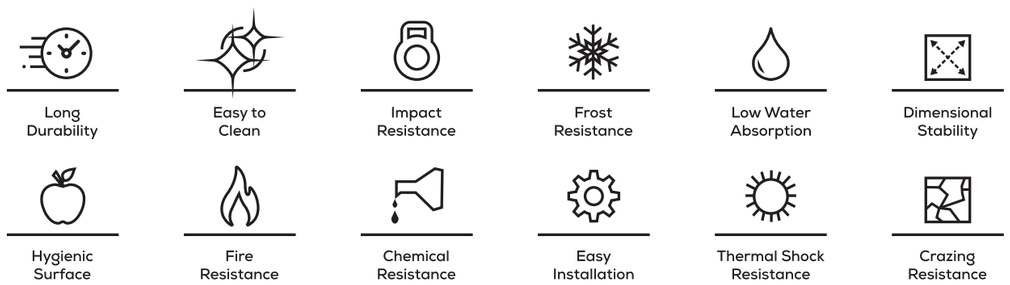

Long Durability | Easy to Clean | Impact Resistance | Frost Resistance | Low Water Absorption | Dimensional Stability

Hygienic Surface | Fire Resistance | Chemical Resistance | Easy Installation | Thermal Shock Resistance | Crazing Resistance

THAR

Thar Sand
Thar Dawn
Thar Wood

Sizes

60x120cm
60x60cm
30x60cm
30x30cm (Mosaic)



THAR



FLOOR
Thar Sand | Size - 60x120cm



FLOOR
Thar Sand | Size - 60x120cm



WALL
Thar Wood | Size - 30x30cm(mosaic)
Thar Wood | Size - 60x120cm

THAR



FLOOR
Thar Dawn | Size - 60x120cm


Thar Sand



THAR



60x120cm 6 Faces

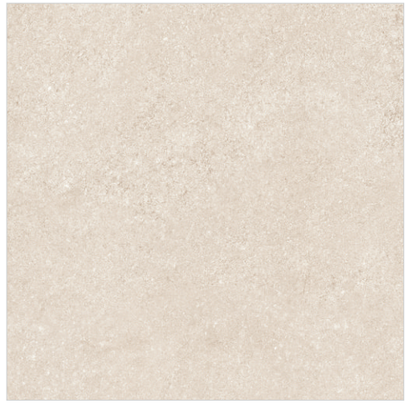

60x60cm* 10 Faces




30x60cm* 20 Faces



30x30cm* Mosaic

SAND FINISH
GLAZED VITRIFIED TILES

COLOURED BODY



*All designs are available in 60x60cm, 30x60cm & 30x30cm(mosaic) size on special request with MOQ

Thar Dawn



THAR



60x120cm 6 Faces



60x60cm* 10 Faces



30x60cm* 20 Faces



30x30cm* Mosaic

SAND FINISH
GLAZED VITRIFIED TILES


COLOURED BODY




Use for Wall



Use for Floor



4mm Spacer Recommended



9mm Thickness

*All designs are available in 60x60cm, 30x60cm & 30x30cm(mosaic) size on special request with MOQ

Thar Wood



THAR




60x120cm 6 Faces



60x60cm* 10 Faces




30x60cm* 20 Faces



30x30cm* Mosaic

SAND FINISH
GLAZED VITRIFIED TILES

COLOURED BODY



*All designs are available in 60x60cm, 30x60cm & 30x30cm(mosaic) size on special request with MOQ

THAR

Thar Stream
Thar Smoke
Thar Coal

Sizes

60x120cm
60x60cm
30x60cm
30x30cm (Mosaic)



THAR

WALL
Thar Smoke & Stream | Size - 60x120cm

FLOOR
Thar Stream | Size - 60x120cm



WALL
Thar Stream | Size - 30x30cm(mosaic)
Thar Smoke | Size - 60x120cm

FLOOR
Thar Stream | Size - 60x120cm



WALL
Thar Stream | Size - 30x30cm(mosaic)
Thar Stream | Size - 60x120cm

FLOOR
Thar Stream | Size - 60x120cm

THAR



WALL
Thar Coal | Size - 60x120cm

FLOOR
Thar Coal | Size - 60x120cm

Thar Stream



THAR




60x120cm 6 Faces



60x60cm* 10 Faces



30x60cm* 20 Faces



30x30cm* Mosaic

SAND FINISH
GLAZED VITRIFIED TILES

COLOURED BODY




Use for Wall



Use for Floor



4mm Spacer Recommended



9mm Thickness

*All designs are available in 60x60cm, 30x60cm & 30x30cm(mosaic) size on special request with MOQ

Thar Smoke



THAR



60x120cm 6 Faces



60x60cm* 10 Faces




30x60cm* 20 Faces



30x30cm* Mosaic

SAND FINISH
GLAZED VITRIFIED TILES

COLOURED BODY



*All designs are available in 60x60cm, 30x60cm & 30x30cm(mosaic) size on special request with MOQ


Thar Coal




THAR




60x120cm 6 Faces

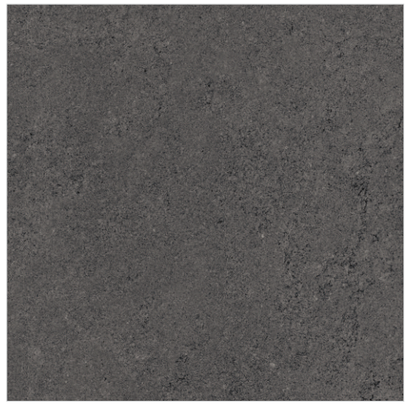

60x60cm* 10 Faces

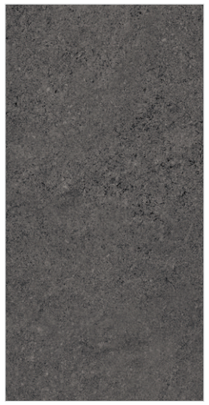

30x60cm* 20 Faces



30x30cm*
Mosaic

SAND FINISH
GLAZED VITRIFIED TILES

COLOURED BODY




Use for Wall



Use for Floor



4mm Spacer Recommended



9mm Thickness

*All designs are available in 60x60cm, 30x60cm & 30x30cm(mosaic) size on special request with MOQ

Colortile Quality Standards

Standards according to **ISO 13006: Annex G - EN 14411: Annex G.** Dry - Pressed Ceramic Tiles. **Group BIa ($E_b \leq 0.5\%$)**

Technical Feature	Test Method	Requirements		Colortile Values	
		%	mm	%	mm
A. Dimensions and Surface Quality					
Length and Width	UNI EN ISO 10545-2	± 0.6%	± 2.0	± 0.20%	± 1.0
Thickness		± 5.0%	± 0.5	± 5.00%	± 0.5
Straightness of Sides		± 0.5%	± 1.5	± 0.20%	± 1.0
Rectangularity		± 0.5%	± 2.0	± 0.20%	± 1.2
Surface Flatness					
a) Centre curvature		± 0.5%	± 2.0	± 0.20%	± 1.0
b) Edge curvature		± 0.5%	± 2.0	± 0.20%	± 1.0
c) Warpage		± 0.5%	± 2.0	± 0.20%	± 1.0
Surface Quality		A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles.		Compliant	
B. Physical Properties					
Water Absorption	UNI EN ISO 10545-3	$E_b \leq 0.5\%$ Individual maximum : 0.6% (absorbed water mass)		$E_b \leq 0.1\%$ (absorbed water mass)	
Breaking Strength	UNI EN ISO 10545-4	Min. 1300 N		≥ 1700 N	
Modulus of Rupture		Average minimum 35 N/mm² Individual minimum 32 N/mm²		≥ 37 N/mm²	
Frost Resistance	UNI EN ISO 10545-12	Required		Compliant	
Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°c	UNI EN ISO 10545-8	Required		$6 \times 10^{-6}\ K^{-1}$ max	
Scratch Hardness (Mohs scale)	EN 101	Declared by the producer		3 to 6 Depends on Finish & Color	
Crazing Resistance	UNI EN ISO 10545-11	Declared by the producer		4 Cycle Pass	
C. Chemical Properties					
Resistance to Staining	UNI EN ISO 10545-14	Minimum Class 3		5	
Resistance to Household Chemicals and Swimming Pool Salts	UNI EN ISO 10545-13	Minimum GB		GA	
Resistance to Low Concentrations of Acids and Alkalis		To be reported		GLA	
Resistance to High Concentrations of Acids and Alkalis		To be reported		GHA	

Standard Pallet Packing

Pallet Type	Size	Thickness	pcs / Box	m² / Box	kg / Box	Box / Pallet	m² / Pallet	Pallet Size
A	30x60cm	8.5mm	8 pcs	1.44 Sq m	28.0 kg	40	57.60 Sq m	925x1100mm
A	60x60cm	8.5mm	4 pcs	1.44 Sq m	28.5 kg	40	57.60 Sq m	925x1100mm
A	60x120cm	9.0mm	2 pcs	1.44 Sq m	31.0 kg	64	92.16 Sq m	1100x1100mm
B	60x120cm	9.0mm	2 pcs	1.44 Sq m	31.0 kg	23	33.12 Sq m	675x1200mm
C	60x120cm	9.0mm	2 pcs	1.44 Sq m	31.0 kg	28	40.32 Sq m	750x1200mm

Euro Pallet Packing

Pallet Type	Size	Thickness	pcs / Box	m² / Box	kg / Box	Box / Pallet	m² / Pallet	Pallet Size
A	30x60cm	8.5mm	8 pcs	1.44 Sq m	28.0 kg	36	51.84 Sq m	800x1200mm
A	60x60cm	8.5mm	4 pcs	1.44 Sq m	28.5 kg	36	51.84 Sq m	800x1200mm
A	60x120cm	9.0mm	2 pcs	1.44 Sq m	31.0 kg	54	77.76 Sq m	800x1200mm
B	60x120cm	9.0mm	2 pcs	1.44 Sq m	31.0 kg	30	43.20 Sq m	800x1200mm

colortile
ceramics & innovation

colortile
ceramics & innovation

Color Granito Pvt. Ltd.

At. Ratavirda Village,
Sartanpar Road, Tal. Wankaner - 363 621,
Dist. Morbi, Gujarat, INDIA

info@colortile.in | www.colortile.in